


Schienen – Klemmplatten – Unterlagen

SERIE 5116 - Technische Spezifikation

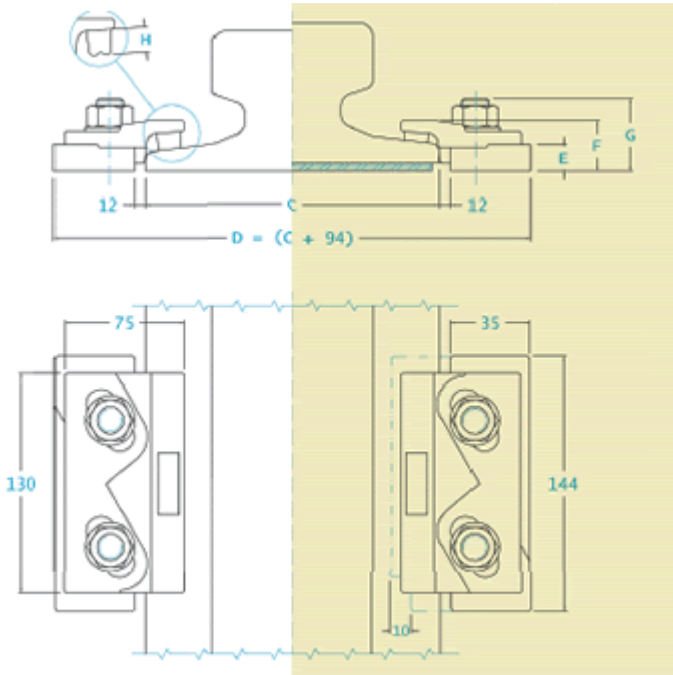


Ausrichtmöglichkeit 10 mm

zul. Seitenkraft 125 kN

Anzugsmoment 175 Nm

Güte 8.8 für Schraube M16

	A [mm]	B [mm]	C [mm]	Ohne Unterlage	Mit Unterlage
S10	32	70	58	----	5116-32-13
S14	38	80	70	----	5116-32-13
S18	43	93	82	----	5116-32-13
S20	44	100	82	5116-32-6	5116-32-13
S24	53	115	90	5116-32-6	5116-32-13
25 Kg/m	50	115	90	5116-32-6	5116-32-13
S26	50	110	100	5116-32-6	5116-32-13
27 Kg/m	50	120	95	5116-32-6	5116-32-13
AFNOR 30	56	125,5	106	5116-32-6	5116-32-13
S33	58	134	105	5116-34-8	5116-34-15
60 UNI	72	172	150	----	5116-34-18
A45	45	55	125	5116-32-6	5116-32-13
A55	55	65	150	5116-32-6	5116-32-13
A65	65	75	175	5116-34-8	5116-34-15
A75	75	85	200	5116-34-8	5116-34-15
A100	100	95	200	5116-34-8	5116-34-18
A120	120	105	220	5116-32-13	5116-34-18
A150	150	150	220	5116-34-15	----
CR104	63,5	127	127	5116-32-13	5116-34-18
CR135	87,3	146	131,7	5116-32-13	5116-34-18
CR171	109,2	152,4	152,4	5116-34-15	----
CR175	102,4	152,4	152,4	5116-32-13	----
MRS 87 A	101,6	152,4	152,4	5116-34-15	----

ABMESSUNGEN [mm]	E	F	G	H	I	L	L1	L2	M	N	O	P	GEWICHT [Kg]
5116-32-6	14	32	45	20	-	-	-	-	-	-	-	-	1,327
5116-34-8	16	34	45	20	-	-	-	-	-	-	-	-	1,407
5116-32-13	14	32	45	13	-	-	-	-	-	-	-	-	1,327
5116-34-15	16	34	45	13	-	-	-	-	-	-	-	-	1,407
5116-34-18	16	32	45	10	-	-	-	-	-	-	-	-	1,407