



Schienen – Klemmplatten – Unterlagen

SERIE 7020 - Technische Spezifikation



Ohne Unterlage

Mit Unterlage

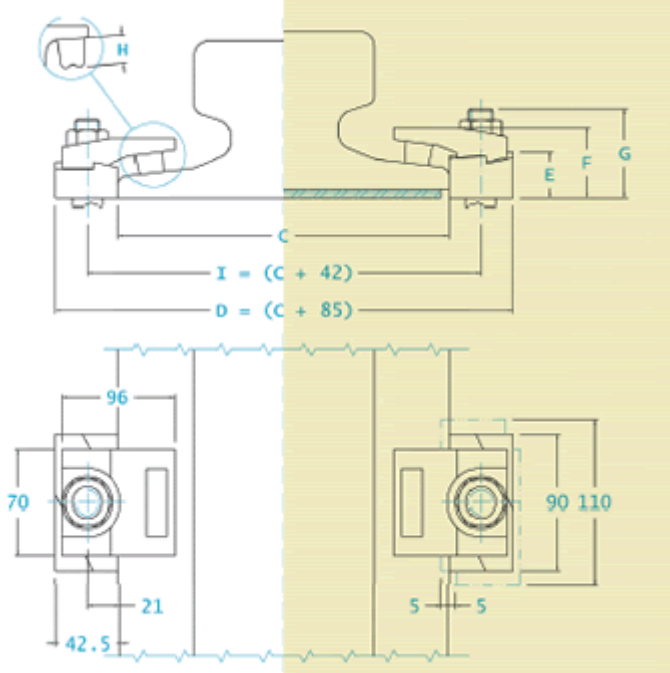


Ausrichtmöglichkeit 10 mm

Seitenkraft 75 KN

Anzugsmoment 320 Nm

**Für Schraube M 20 Güte 8.8
(nicht im Lieferumfang enthalten)**

	A [mm]	B [mm]	C [mm]	Ohne Unterlage	Mit Unterlage
36 UNI	60	130	100	7020-40-10	7020-40-15
46 UNI	65	145	135	7020-40-10	7020-40-15
50 UNI	67	148	135	7020-40-10	7020-40-15
S49	68	149	125	7020-40-10	7020-40-15
UIC 54	70	159	140	7020-29-10	7020-40-15
60 UNI	72	172	150	7020-40-10	7020-40-15
A65	65	75	175	7020-40-10	7020-40-15
A75	75	85	200	7020-40-10	7020-40-15
A100	100	95	200	7020-40-10	7020-40-15
A120	120	105	220	7020-40-15	7020-40-19
A150	150	150	220	7020-40-15	7020-47-22
CR104	63.5	127	127	7020-40-15	7020-47-22
CR105	65	131.7	131.7	7020-40-10	7020-40-19
CR135	87.3	146	131.7	7020-40-15	7020-47-22
CR171	109.2	152.4	152.4	7020-40-15	7020-47-22
CR175	102.4	152.4	152.4	7020-40-15	7020-47-22
MRS 87 A	101.6	152.4	152.4	7020-40-15	7020-47-22
MRS 125	120	180	180	7020-47-22	-----

ABMESSUNGEN [mm]	E	F	G	H	I	L	L1	L2	M	N	O	P	GEWICHT [Kg]
7020-40-10	24	40	60	19	-	-	-	-	-	-	-	-	0.911
7020-40-15	24	40	60	14	-	-	-	-	-	-	-	-	0.911
7020-40-19	24	40	60	10	-	-	-	-	-	-	-	-	0.911
7020-47-22	31	47	67	14	-	-	-	-	-	-	-	-	1.211
7020-47-16	31	47	67	10	-	-	-	-	-	-	-	-	1.211