


# SERIES 2024 – Technical specification



Without pad mounting

With pad mounting

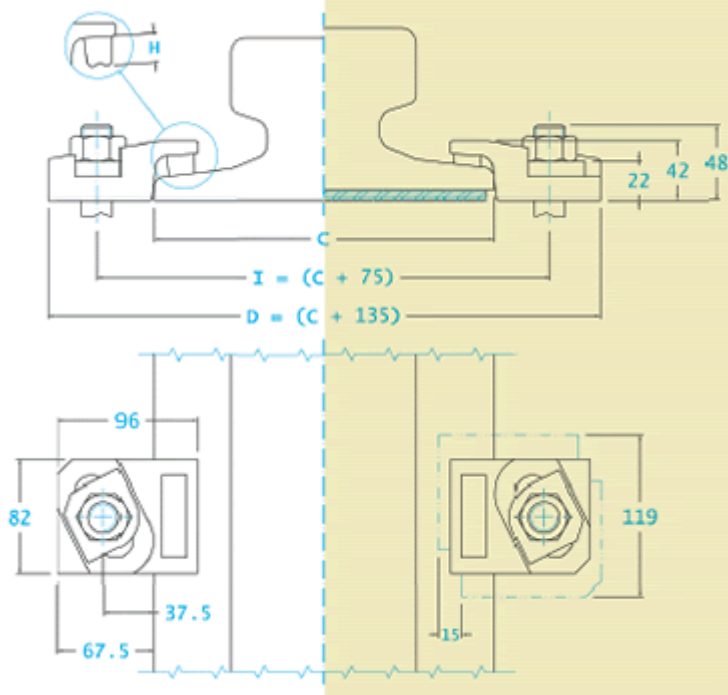


Adjustment 15 mm

Side load 125 KN

Torque tightening 550 Nm

For screws M 24 Quality 8.8  
(not included)

	A [mm]	B [mm]	C [mm]	Without Pad	With Pad
S24	53	115	90	----	2024-42-13
25 Kg/m	50	115	90	----	2024-42-13
S26	50	110	100	----	2024-42-13
AFNOR 30	56	125.5	106	----	2024-42-13
UIC 60	72	172	150	----	2024-42-18
A55	55	65	150	----	2024-42-13
A65	65	75	175	----	2024-42-13
A 75	75	85	200	2024-42-9	2024-42-18
A100	100	95	200	2024-42-9	2024-42-18
A120	120	105	220	2024-42-13	2024-42-18
A150	150	150	220	----	2024-42-23
CR104	63.5	127	127	2024-42-13	2024-42-18
CR105	65	131.7	131.7	2024-42-13	2024-42-18
CR135	87.3	146	131.7	2024-42-13	2024-42-18
CR171	109.2	152.4	152.4	2024-42-13	----
CR175	102.4	152.4	152.4	2024-42-18	2024-42-23
MRS 87 A	101.6	152.4	152.4	2024-42-18	2024-42-23
MRS 125	120	180	180	2024-42-23	----

DIMENSIONS [mm]	E	F	G	H	I	L	L1	L2	M	N	O	P	WEIGHT [Kg]
2024-42-13	-	-	-	19	-	-	-	-	-	-	-	-	0.844
2024-42-18	-	-	-	14	-	-	-	-	-	-	-	-	0.844
2024-42-23	-	-	-	9	-	-	-	-	-	-	-	-	0.844