


SERIES 2124 – Technical specification



Without pad mounting

With pad mounting

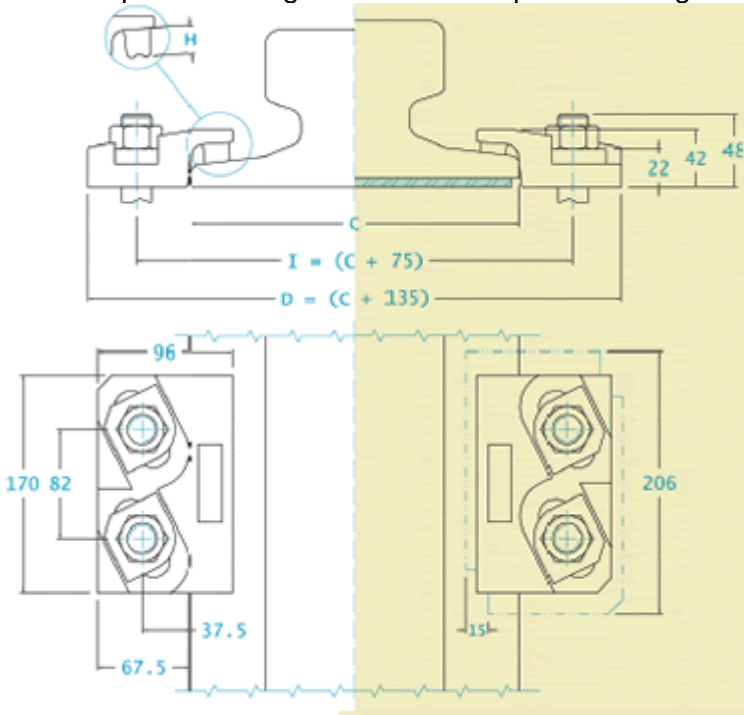

Adjustment 15 mm

Side load 250 KN

Torque tightening 550 Nm

For screws M 24 Quality 8.8
(not included)

	A [mm]	B [mm]	C [mm]	Without Pad	With Pad
S24	53	115	90	-----	2124-42-13
25 Kg/m	50	115	90	-----	2124-42-13
S26	50	110	100	-----	2124-42-13
27 Kg/m	50	120	95	-----	2124-42-13
AFNOR 30	56	125.5	106	-----	2124-42-13
60 UNI	72	172	150	-----	2124-42-18
A45	45	55	125	-----	2124-42-13
A55	55	65	150	-----	2124-42-13
A65	65	75	175	-----	2124-42-13
A120	120	105	220	2124-42-13	2124-42-18
A150	150	150	220	-----	2124-42-23
CR104	63.5	127	127	2124-42-13	2124-42-18
CR105	65	131.7	131.7	2124-42-13	2124-42-18
CR135	87.3	146	131.7	2124-42-13	2124-42-18
CR171	109.2	152.4	152.4	2124-42-13	-----
CR175	102.4	152.4	152.4	2124-42-18	2124-42-23
MRS 87 A	101.6	152.4	152.4	2124-42-18	2124-42-23
MRS 125	120	180	180	2124-42-23	-----

DIMENSIONS [mm]	E	F	G	H	I	L	L1	L2	M	N	O	P	WEIGHT [Kg]
2124-42-13	-	-	-	19	-	-	-	-	-	-	-	-	1.688
2124-42-18	-	-	-	14	-	-	-	-	-	-	-	-	1.688
2124-42-23	-	-	-	9	-	-	-	-	-	-	-	-	1.688