


SERIES 5116 - Technical specification

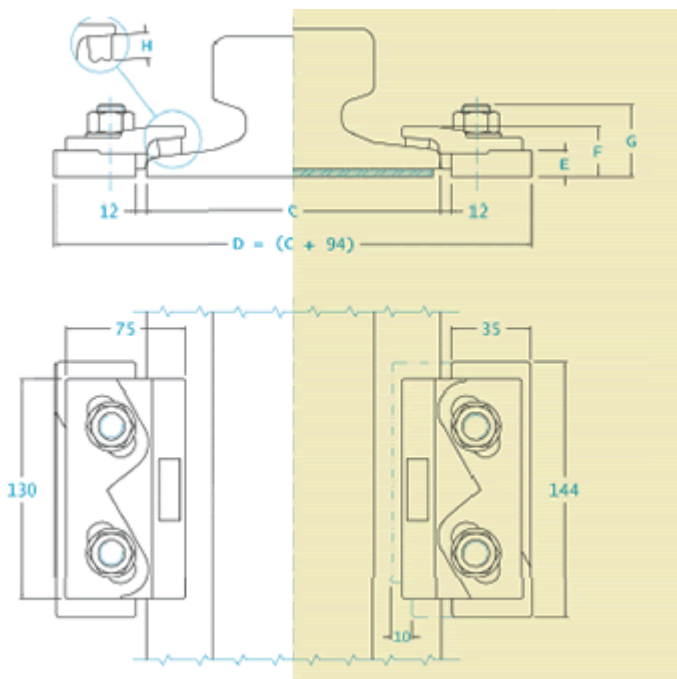


Adjustment 10 mm

Side load 125 KN

Torque tightening 175 Nm

Quality 8.8 - Special Screw M16

|  | A [mm] | B [mm] | C [mm] | Without Pad | With Pad |
|---|-----------|-----------|-----------|----------------|-------------|
| S10 | 32 | 70 | 58 | ---- | 5116-32-13 |
| S14 | 38 | 80 | 70 | ---- | 5116-32-13 |
| S18 | 43 | 93 | 82 | ---- | 5116-32-13 |
| S20 | 44 | 100 | 82 | 5116-32-6 | 5116-32-13 |
| S24 | 53 | 115 | 90 | 5116-32-6 | 5116-32-13 |
| 25 Kg/m | 50 | 115 | 90 | 5116-32-6 | 5116-32-13 |
| S26 | 50 | 110 | 100 | 5116-32-6 | 5116-32-13 |
| 27 Kg/m | 50 | 120 | 95 | 5116-32-6 | 5116-32-13 |
| AFNOR 30 | 56 | 125,5 | 106 | 5116-32-6 | 5116-32-13 |
| S33 | 58 | 134 | 105 | 5116-34-8 | 5116-34-15 |
| 60 UNI | 72 | 172 | 150 | ---- | 5116-34-18 |
| A45 | 45 | 55 | 125 | 5116-32-6 | 5116-32-13 |
| A55 | 55 | 65 | 150 | 5116-32-6 | 5116-32-13 |
| A65 | 65 | 75 | 175 | 5116-34-8 | 5116-34-15 |
| A75 | 75 | 85 | 200 | 5116-34-8 | 5116-34-15 |
| A100 | 100 | 95 | 200 | 5116-34-8 | 5116-34-18 |
| A120 | 120 | 105 | 220 | 5116-32-13 | 5116-34-18 |
| A150 | 150 | 150 | 220 | 5116-34-15 | ---- |
| CR104 | 63,5 | 127 | 127 | 5116-32-13 | 5116-34-18 |
| CR135 | 87,3 | 146 | 131,7 | 5116-32-13 | 5116-34-18 |
| CR171 | 109,2 | 152,4 | 152,4 | 5116-34-15 | ---- |
| CR175 | 102,4 | 152,4 | 152,4 | 5116-32-13 | ---- |
| MRS 87 A | 101,6 | 152,4 | 152,4 | 5116-34-15 | ---- |

| DIMENSIONS [mm] | E | F | G | H | I | L | L1 | L2 | M | N | O | P | WEIGHT [Kg] |
|--------------------|----|----|----|----|---|---|----|----|---|---|---|---|----------------|
| 5116-32-6 | 14 | 32 | 45 | 20 | - | - | - | - | - | - | - | - | 1,327 |
| 5116-34-8 | 16 | 34 | 45 | 20 | - | - | - | - | - | - | - | - | 1,407 |
| 5116-32-13 | 14 | 32 | 45 | 13 | - | - | - | - | - | - | - | - | 1,327 |
| 5116-34-15 | 16 | 34 | 45 | 13 | - | - | - | - | - | - | - | - | 1,407 |
| 5116-34-18 | 16 | 32 | 45 | 10 | - | - | - | - | - | - | - | - | 1,407 |