



# SERIES F - Technical specification

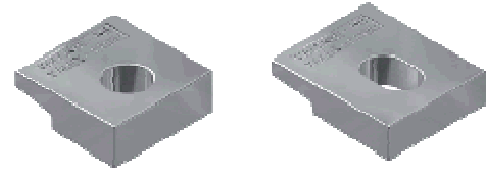


Without pad mounting

With pad mounting

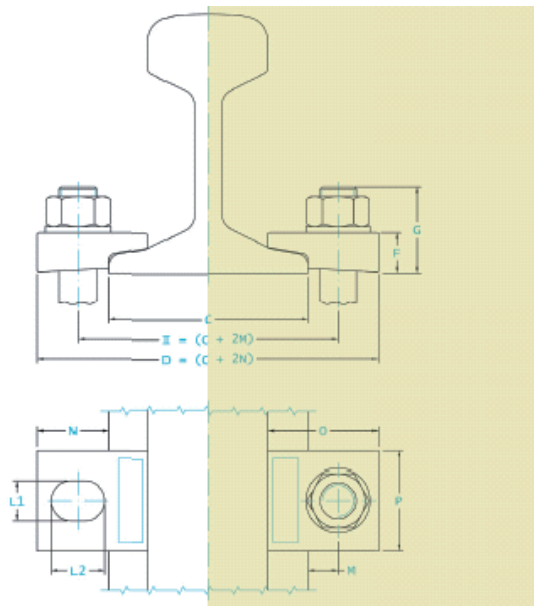

	Adjustment	Side load	torque-tightening	For Screw
F036-20	---	50 KN	220 Nm	M 18 - 8.8
F036-23	---	70 KN	320 Nm	M 20 - 8.8
F036-25	---	80 KN	550 Nm	M 24 - 8.8
F046	---	70 KN	320 Nm	M 20 - 8.8
F050	8 mm	70 KN	320 Nm	M 20 - 8.8
F060	---	85 KN	550 Nm	M 24 - 8.8

	A (mm)	B (mm)	C (mm)	Without Pad mounting	With Pad mounting
36 UNI	60	130	100	F036 - 20	---
				F036 - 23	---
				F036 - 25	---
46 UNI	65	145	135	F046	---
50 UNI	67	148	135	F050	---
S49	68	149	125	F050	---
UIC 54	70	159	140	F060	---
60 UNI	72	172	150	F060	---

DIMENSIONS [mm]	E	F	G	H	L	L1	L2	M	N	O	P	WEIGHT [Kg]
F036 - 20	-	20	45	-	-	20	20	15	35	55	50	0.315
F036 - 23	-	20	45	-	-	23	23	15	35	55	50	0.3
F036 - 25	-	20	48	-	-	25	25	15	35	55	50	0.29
F046	-	25	50	-	-	23	23	11.5	47.5	70	60	0.485
F050	-	21	46	-	-	23	35	22.5	55	85	70	0.78
F060	-	22	50	-	-	27	27	22.5	50	70	70	0.565