


Schienen – Klemmplatten – Unterlagen

SERIE 2012 – Technische Spezifikation



Ohne Unterlage

Mit Unterlage

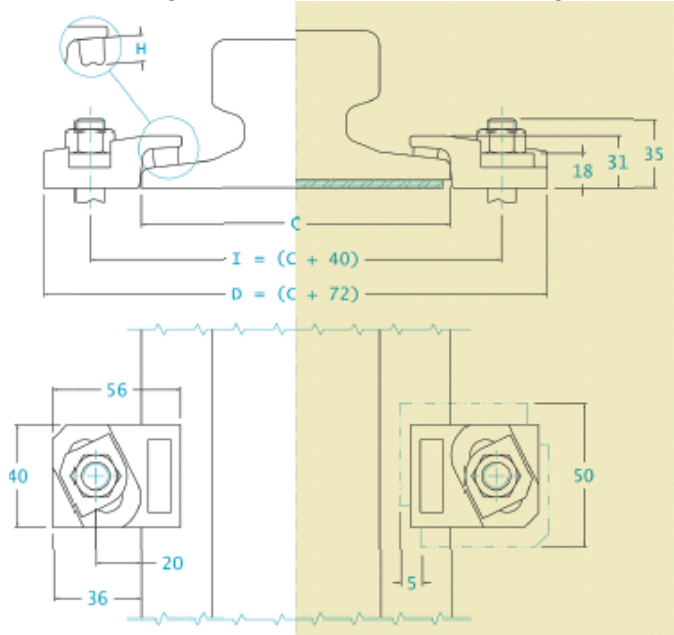

(Lieferung ohne Unterlegscheibe)

Ausrichtmöglichkeit 5 mm

Seitenkraft 18 KN

Anzugsmoment 75 Nm

**Für Schrauben M 12 Güte 8.8
(nicht im Lieferumfang enthalten)**

	A [mm]	B [mm]	C [mm]	Ohne Unterlage	Mit Unterlage
S10	32	70	58	2012-31-6	2012-31-10
S14	38	80	70	2012-31-6	2012-31-10
S18	43	93	82	2012-31-6	2012-31-10
S20	44	100	82	2012-31-6	2012-31-10
S24	53	115	90	2012-31-6	2012-31-10
25 Kg/m	50	115	90	2012-31-6	2012-31-10
S26	50	110	100	2012-31-6	2012-31-10
27 Kg/m	50	120	95	2012-31-6	2012-31-10
AFNOR 30	56	125,5	106	2012-31-6	2012-31-10
46 UNI	65	145	135	2012-31-10	-----
50 UNI	67	148	135	2012-31-10	-----
S49	68	149	125	2012-31-10	-----
UIC 54	70	159	140	2012-31-10	-----
60 UNI	72	172	150	2012-31-10	-----
A45	45	55	125	2012-31-6	2012-31-13
A55	55	65	150	2012-31-6	2012-31-13
A65	65	75	175	2012-31-10	2012-31-13
A75	75	85	200	2012-31-10	-----
A100	100	95	200	2012-31-10	-----
A120	120	105	220	2012-31-13	-----
CR104	63,5	127	127	2012-31-13	-----
CR105	65	131,7	131,7	2012-31-10	-----
CR135	87,3	146	131,7	2012-31-13	-----
CR175	102,4	152,4	152,4	2012-31-13	-----

ABMESSUNGEN [mm]	E	F	G	H	I	L	L1	L2	M	N	O	P	GEWICHT [Kg]
2012-31-6	-	-	-	17	-	-	-	-	-	-	-	-	0,21
2012-31-10	-	-	-	13	-	-	-	-	-	-	-	-	0,21
2012-31-13	-	-	-	10	-	-	-	-	-	-	-	-	0,21