


# Schienen – Klemmplatten – Unterlagen

## SERIE 2024 – Technische Spezifikation



Ohne Unterlage

Mit Unterlage

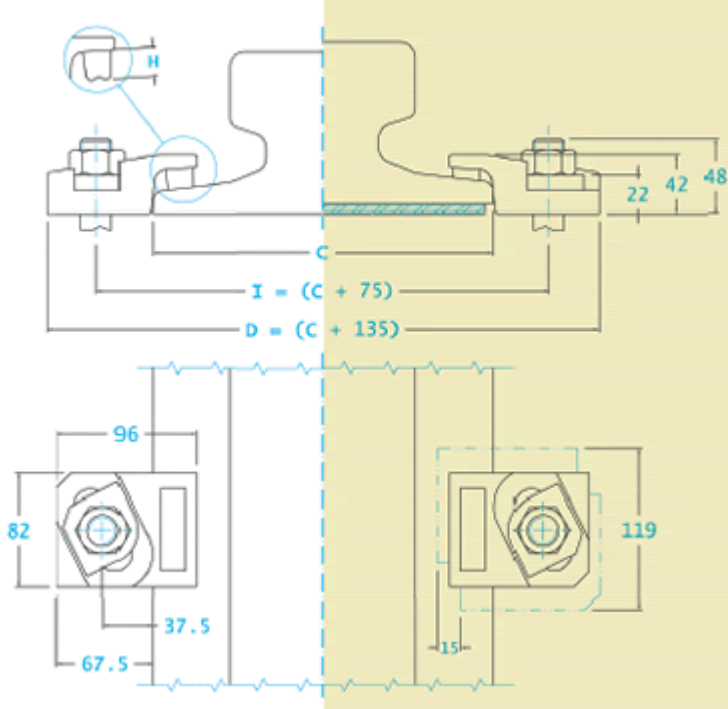


**Ausrichtmöglichkeit 15 mm**

**zul. Seitenkraft 125 kN**

**Anzugsmoment 550 Nm**

**Für Schrauben M 24 Güte 8.8  
(nicht im Lieferumfang enthalten)**

	<b>A</b> [mm]	<b>B</b> [mm]	<b>C</b> [mm]	<b>Ohne Unterlage</b>	<b>Mit Unterlage</b>
S24	53	115	90	-----	2024-42-13
25 Kg/m	50	115	90	-----	2024-42-13
S26	50	110	100	-----	2024-42-13
AFNOR 30	56	125.5	106	-----	2024-42-13
UIC 60	72	172	150	-----	2024-42-18
A55	55	65	150	-----	2024-42-13
A65	65	75	175	-----	2024-42-13
A 75	75	85	200	2024-42-9	2024-42-18
A100	100	95	200	2024-42-9	2024-42-18
A120	120	105	220	2024-42-13	2024-42-18
A150	150	150	220	-----	2024-42-23
CR104	63.5	127	127	2024-42-13	2024-42-18
CR105	65	131.7	131.7	2024-42-13	2024-42-18
CR135	87.3	146	131.7	2024-42-13	2024-42-18
CR171	109.2	152.4	152.4	2024-42-13	-----
CR175	102.4	152.4	152.4	2024-42-18	2024-42-23
MRS 87 A	101.6	152.4	152.4	2024-42-18	2024-42-23
MRS 125	120	180	180	2024-42-23	-----

<b>ABMESSUNGEN</b> [mm]	<b>E</b>	<b>F</b>	<b>G</b>	<b>H</b>	<b>I</b>	<b>L</b>	<b>L1</b>	<b>L2</b>	<b>M</b>	<b>N</b>	<b>O</b>	<b>P</b>	<b>GEWICHT</b> [Kg]
2024-42-13	-	-	-	19	-	-	-	-	-	-	-	-	0.844
2024-42-18	-	-	-	14	-	-	-	-	-	-	-	-	0.844
2024-42-23	-	-	-	9	-	-	-	-	-	-	-	-	0.844