


# Schienen – Klemmplatten – Unterlagen

## SERIE 2016 – Technische Spezifikation

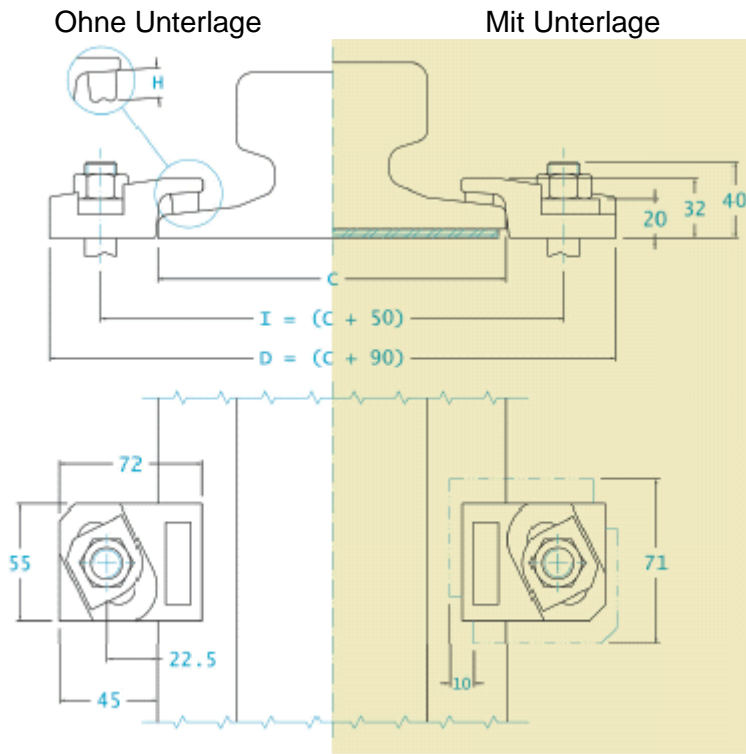


**Ausrichtmöglichkeit 10 mm**

**Seitenkraft 35 kN**

**Anzugsmoment 175 Nm**

**Für Schrauben M 16 Güte 8.8  
(nicht im Lieferumfang enthalten)**

|  | A<br>[mm] | B<br>[mm] | C<br>[mm] | Ohne Unterlage | Mit Unterlage |
|---|-----------|-----------|-----------|----------------|---------------|
| S14   | 38        | 80        | 70        | 2016-32-6      | 2016-32-13    |
| S18   | 43        | 93        | 82        | 2016-32-6      | 2016-32-13    |
| S20   | 44        | 100       | 82        | 2016-32-6      | 2016-32-13    |
| S24   | 53        | 115       | 90        | 2016-32-6      | 2016-32-13    |
| 25 Kg/m   | 50        | 115       | 90        | 2016-32-6      | 2016-32-13    |
| S26   | 50        | 110       | 100       | 2016-32-6      | 2016-32-13    |
| 27 Kg/m   | 50        | 120       | 95        | 2016-32-6      | 2016-32-13    |
| AFNOR 30  | 56        | 125.5     | 106       | 2016-32-6      | 2016-32-13    |
| A45   | 45        | 55        | 125       | 2016-32-6      | 2016-32-13    |
| A55   | 55        | 65        | 150       | 2016-32-6      | 2016-32-13    |
| A65   | 65        | 75        | 175       | -----          | 2016-32-13    |
| A120  | 120       | 105       | 220       | 2016-32-13     | -----         |
| CR104   | 63.5      | 127       | 127       | 2016-32-13     | -----         |
| CR135   | 87.3      | 146       | 131.7     | 2016-32-13     | -----         |
| CR175   | 102.4     | 152.4     | 152.4     | 2016-32-13     | -----         |

| ABMESSUNGEN<br>[mm] | E | F | G | H  | I | L | L1 | L2 | M | N | O | P | GEWICHT<br>[Kg] |
|---------------------|---|---|---|----|---|---|----|----|---|---|---|---|-----------------|
| 2016-32-6           | - | - | - | 16 | - | - | -  | -  | - | - | - | - | 0.387           |
| 2016-32-13          | - | - | - | 9  | - | - | -  | -  | - | - | - | - | 0.387           |